


FINISHING YOUR BASEMENT?

Barricade

Insulated Subfloor Tile



The easy-to-install basement system that saves on energy costs, protects your property from water damage and preserves a healthier living space.

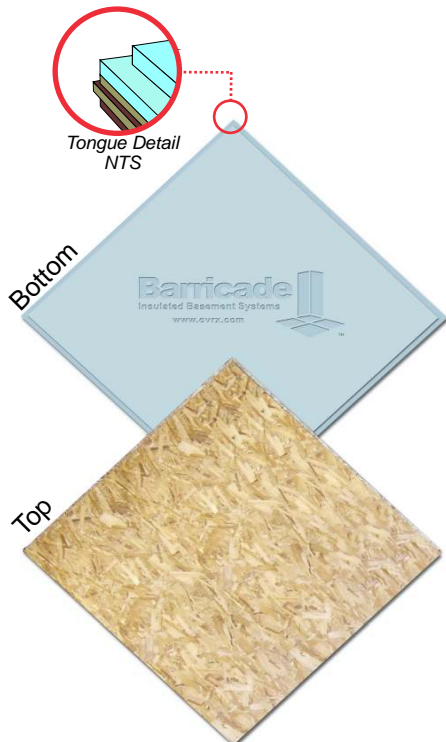

Surface area: 23.5" X 23.5" - 3.84 sq ft
Thickness: 1.125"
Weight: 7.5 lbs
R-value: 3.2



Insulation - the only subfloor backed with Blue Styrofoam

- + R-value 3.2: Your floors will feel up to 10°C or 15°F degrees warmer!
- + Insulation means energy savings and rebates.
- + Reduces condensation and insulates your basement by eliminating air space between your concrete and your subfloor. Having an air space contributes to condensation unless it is vented and by venting you lose all the insulating benefits of stagnant air. Barricade Insulated Subfloor tiles makes your basement a "No Sweat" zone without compromising insulation.
- + Extruded Insulation does not absorb water.
- + IIC/STC Rating 55 means that the floor is soft to walk on and doesn't clack.
- + 5000 lbs/sq ft compression strength will hold your piano or your pool table.

Gasket seal

- + When locked together the specially-milled gasket creates a seal that prevents moisture from coming between the tiles to damage your flooring.

Drainage groove

- + Around the perimeter of each tile is a drainage groove that allows moisture to flow to a sump or drain.

OSB (Oriented Strand Board)


- + Premium OSB exceeds formaldehyde emission regulations with little to no off-gassing.
- + Top surface is ready for your finished flooring.

Tongue & Groove design

- + Makes for easy installation.

3 Easy Installation Steps

1. Start with a clean and level floor.
2. Place temporary spacer blocks around the perimeter and install the first row.
3. Stagger subsequent rows.

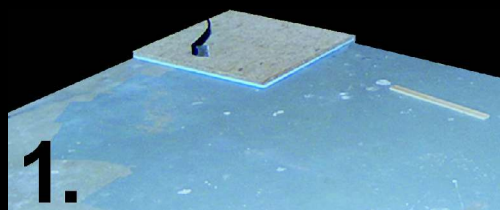

See www.ovrx.com for detailed instructions